


LanTEK III Series Software Release Note

Software Version: 3.212

Release Date: 08 Nov 2018

Software version 3.117 or later must be installed on the LanTEK III before updating to version 3.212.

From the home screen, select Instrument then About to view the current version.

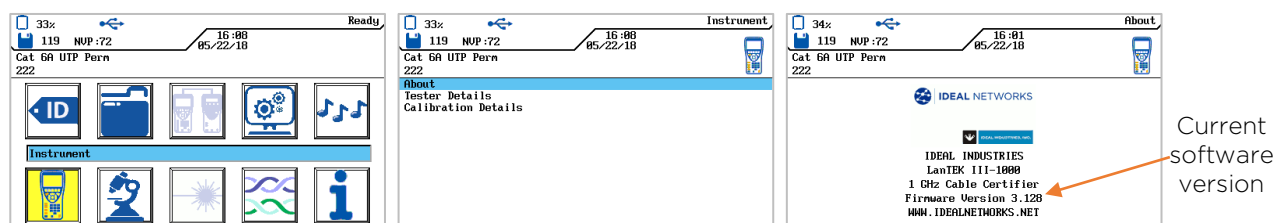

Click the link below to download version 3.117 if the version currently on the tester is lower than 3.117.

[Download LanTEK III 3.117 Software Here](#)

This release note accompanies software version 3.212 of the LanTEK III Series cable certifier from IDEAL Networks. The following changes have been made from version 3.203:

- Added Belden 2183 4K UHD test standards including.
 - Test configurations:
 1. Permanent Link test requires Cat 6A PL adapters
 2. Channel test requires Cat 6A Channel adapters
 3. Direct Attach test requires Cat 6A PL adapters with female-female couplers. Contact Belden for the necessary couplers.
- Added Belden 2183P (Plenum) 4K UHD Media Cable to the manufacturer database,
- Added Belden 2183R (Riser) 4K UHD Media Cable
- Job name file included when jobs copied to USB flash drive. Necessary when uploading test results to IDEAL AnyWARE Cloud.
- Allows custom cables with only length measurement selected.
- Added cables from Leviton to manufacturer database.



IDEAL NETWORKS

- Removed the requirement for field calibration of patch cords for channel testing. Channel tests can be performed with a mix of patch cords between tests.
 - Applies to Cat 5e, 6, 6A and Class D, E, EA, F and FA tests only.
 - Specialty test may require field calibration. The LanTEK III will prompt when field calibration is necessary.
 - *Note: Channel tests do not measure the connection between the test adapter and patch cord. The cord and connection between the patch cord and permanent link is tested.*
- Multiple fixes for Russian language.
- Corrections to TERA tests between Autotest and Analyze mode.
- Corrections for French translations.
- Corrected NEXT problem when testing with EC7 adapters.